



## How to set off-peak charging on the sonnen eco 8.2

The device you use needs to be connected to the same network as the sonnenBatterie.

Open a web browser and go to <https://finde-meine.sonnenbatterie.de>




The page will automatically find your sonnenBatterie.

Select Anzeigen to go to the Login page.

# User Login

## Login

Please login to use the sonnenBatterie Interface

User ▼
Password
 Sign in

Software: 0.8.2.6232 – Channel: testing

Username: User

Password: Sonnen2016

(case sensitive)


# Dashboard

Dashboard

sonnenBatterie


Settings

Inverter

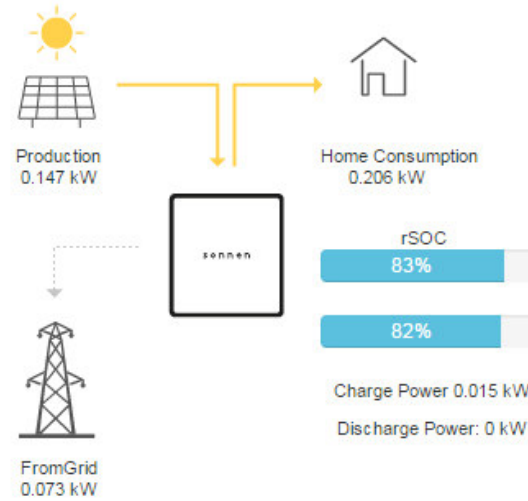

[Go to Settings](#)

# Settings

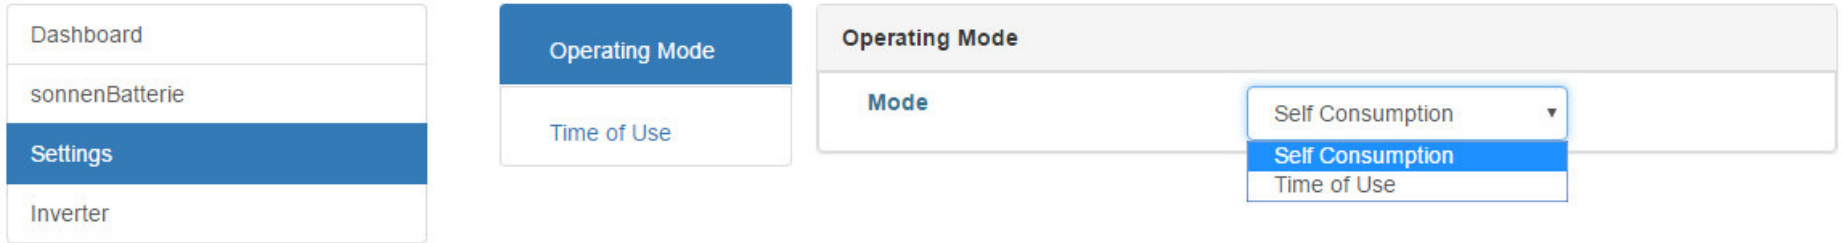

The screenshot shows the Sonnen settings interface. On the left is a sidebar menu with 'Settings' selected. In the center, the 'Operating Mode' tab is active. On the right, the 'Mode' dropdown menu is open, showing 'Self Consumption' selected and 'Time of Use' as an alternative option.

Change the Operating mode from Self consumption to Time of Use.

Then click on the Time of Use Tab.

# Settings

Dashboard
sonnenBatterie
<b>Settings</b>
Inverter

Operating Mode
<b>Time of Use</b>


Time of Use	
<b>Grid Enable</b>	Yes ▾
<b>Peak Hour Start Time</b>	7:00 ⌚
<b>Peak Hour End Time</b>	0:00 ⌚
<b>Low Traiff Charge Time</b>	2:00 ⌚

Select Yes in the Grid enabled tab.

Now select the Start and End hour of your peak electricity tariff.

Then select the time you would like your system to start charging at night.

You have now finished setting up off peak charging on the sonnen Eco 8.

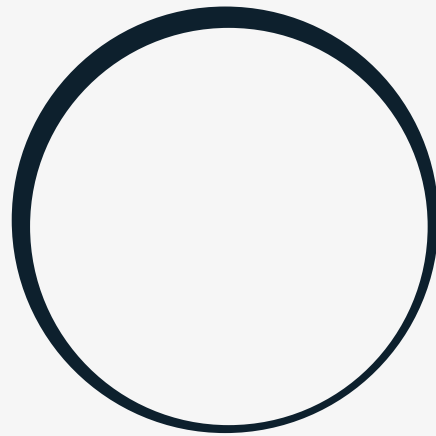

sonnen

energy is yours